


We consider our company to provide creative lighting with incredible service, and product quality is a must! This linear maintains the best performance under extreme conditions.

After 6 years of working in multiple applications, we have developed our **4th generation** of Wall Washers. The products we are offering are user-friendly, have better features and newer technology.

- Linear Series54
- Dazzle Series56
- Mega Series58



WALL WASHERS

Linear Series



This series combines a remarkable rectilinear profile with exaggerated proportions and concealed hardware. Its configuration allows for a superior optical system and rich angles that fit a wide range of applications. They perform strikingly well in bridges, high buildings, and high tower lighting.

Did you know
our Linears can be 24V DC or 110 AC Input? Whichever your requirement is, we want to have it available.



Illuminated by Everlyte -
Fixture Contractor: Henry Inc.



Did you know
that you can make sections controllable with the same fixture? Our Linears can be subdivided so you can control individual sections for different color effects.



Housing color can be customized

We offer the traditional RGB, or RGBW, or White Single Color. But we also offer non-traditional colors.

RGBW DMX512	RGBW DMX512 RDM	White Color DMX512	White Color ON/OFF	Wattage & Input Type	
				AC	Linear 18W
				DC	Linear 24W
				AC	Linear 30W
				DC	Linear 48W
				AC	Linear 60W
				AC	Linear 120W

BB&T

You can see this building from every corner in Atlanta. With over 40 Dazzle fixtures, and controlled from a central location, since 2017 this building is making downtown Atlanta a more colorful place.

Illuminated by Everlyte -
Fixture Contractor: Henry Inc.



Did you know

that our fixtures are RDM? It means bidirectional DMX. You can get readings from the software, write addresses, and use other fixture settings. Now you can have back and forth communication.





Did you know

that we offer additional sizes? We can go bigger or smaller than the options we are currently displaying. Ask us more about it!

Dazzle Series



Heavy-duty construction ensures the ultimate lighting solution for outdoor applications. Dazzle series is the embodiment of flattering illumination with a wide variety of settings. Available in different wattage and input types.

RGBW DMX512 RDM	RGBW DMX512	White Color DMX512	White Color ON/OFF	Wattage & Input Type	
				DC	 Dazzle 12W
				DC	 Dazzle 36W
				AC	 Dazzle 60W
				AC	 Dazzle 120W

WALL WASHERS

NEW PRODUCTS

Mega Series



Die-cast aluminum, glass, and technology come together to create this solid fixture. Mega series provides robust illumination with the latest in LED thinking for applications that require architectural accents.


This application shows the power and versatility of the Mega fixtures. The colors are incredibly crisp and the effects change with the holidays. An icon in the city of Orlando since 2016.

Did you know the housing color can be customized? These are the colors we offer.



Housing color can be customized

Illuminated and designed by Everlyite

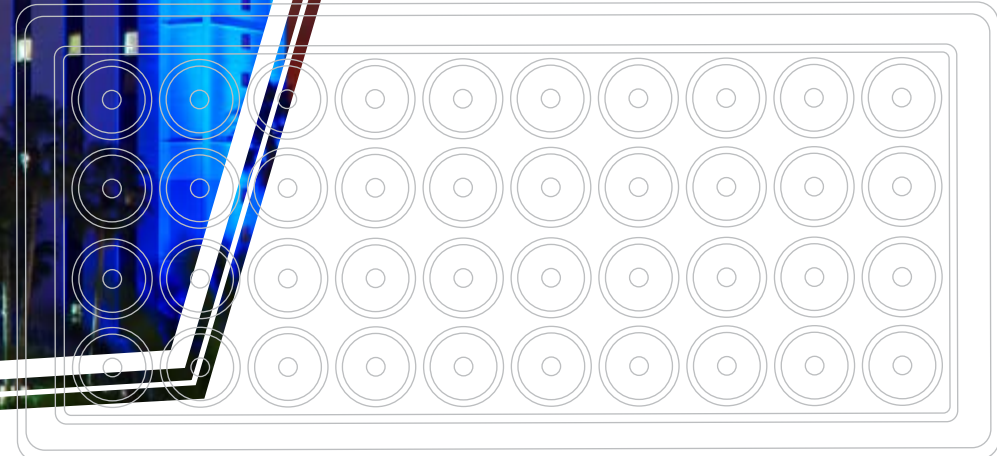

They are lightweight fixtures that have an integrated fan cooling system. The most recommended applications are theme parks, architectural lighting, community parks, or any other structure that desires to become iconic.



Mega 200W
AC



Mega 400W
AC



Mega 800W
AC

Wattage & Input Type			
White Color ON/OFF			
White Color DMX512			
RGBW DMX512 RDM	☐	☐	☐
RGBW DMX512			

Wall Washers Specs

Linear Series

Physical							Electrical		Output	Control
Model	Color	Dimensions (HxWxD)	Color Temperature	Net Weight	LED Quantity	Beam Angle Options	Input Voltage	Power Consumption	lm/fixture	Protocol
W-LN40-24-DWXO-XX	White	2.5" x 40" x 1.4"	1800K-6000K	3.3 lbs	24	20/30/40/60/20x40	24 VDC	24W	2350lm	ON/OFF
W-LN40-24-DWXS-XX	White	2.5" x 40" x 1.4"	1800K-6000K	3.3 lbs	24	20/30/40/60/20x40	24 VDC	24W	2350lm	DMX512
W-LN40-24-DFWR-XX	RGBW	2.5" x 40" x 1.4"	Red 620-626 nm Green 519-526 nm Blue 460-466 nm White (3000, 4000, 6000 K)	3.3 lbs	16	20/30/40/60/20x40	24 VDC	24W	1040lm	DMX512/RDM
W-LN40-48-DWXO-XX	White	3.2" x 40" x 2"	1800 ~ 6000 K	5.5 lbs	24	20/30/40/60/20x40	24 VDC	48W	3750lm	ON/OFF
W-LN40-48-DWXS-XX	White	3.2" x 40" x 2"	1800 ~ 6000 K	5.5 lbs	24	20/30/40/60/20x40	24 VDC	48W	3750lm	DMX512
W-LN40-48-DFWR-XX	RGBW	3.2" x 40" x 2"	Red 620-626 nm Green 519-526 nm Blue 460-466 nm White (3000, 4000, 6000 K)	5.5 lbs	16	20/30/40/60/20x40	24 VDC	48W	1652lm	DMX512/RDM
W-LN40-60-AWXO-XX	White	4" x 40" x 2"	1800 ~ 6000 K	6.6 lbs	24	20/30/40/60/20x40	100 - 220 VAC	60W	3750lm	ON/OFF
W-LN40-60-AWXS-XX	White	4" x 40" x 2"	1800 ~ 6000 K	6.6 lbs	24	20/30/40/60/20x40	100 - 220 VAC	60W	3750lm	DMX512
W-LN12-18-AFWS-XX	RGBW	4" x 12" x 2"	Red 620-626 nm Green 519-526 nm Blue 460-466 nm White (3000, 4000, 6000 K)	2.6 lbs	6	20/30/40/60/20x40	100 - 220 VAC	18W	550lm	DMX512
W-LN20-30-AFWS-XX	RGBW	4" x 20" x 2"	Red 620-626 nm Green 519-526 nm Blue 460-466 nm White (3000, 4000, 6000 K)	3.7 lbs	12	20/30/40/60/20x40	100 - 220 VAC	30W	1085lm	DMX512
W-LN40-60-AFWR-XX	RGBW	4" x 40" x 2"	Red 620-626 nm Green 519-526 nm Blue 460-466 nm White (3000, 4000, 6000 K)	6.6 lbs	16	20/30/40/60/20x40	100 - 220 VAC	60W	2036lm	DMX512/RDM
W-LN40-120-AWXO-XX	White	8.7" x 40" x 6.7"	3000 ~ 6000 K	16.5 lbs	16	20/30/40/60/20x40	100 - 220 VAC	120W	6654lm	ON/OFF
W-LN40-120-AWXS-XX	White	8.7" x 40" x 6.7"	3000 ~ 6000 K	16.5 lbs	16	20/30/40/60/20x40	100 - 220 VAC	120W	6654lm	DMX512
W-LN40-120-AFWR-XX	RGBW	8.7" x 40" x 6.7"	Red 620-626 nm Green 519-526 nm Blue 460-466 nm White (3000, 4000, 6000 K)	16.5 lbs	16	20/30/40/60/20x40	100 - 220 VAC	120W	3465lm	DMX512/RDM

COMMON PARAMETERS

Operating Temperature	Storage Temperature	Housing Material	Housing Color	Certification	Waterproof Grade	Working Life-Span	DC Power Linking	AC Power Linking	DMX Linking
-50 ~ 185 °F	-50 ~ 210 °F	Tensile Aluminum +	Matte Black/ Grey	CE, RoHS	IP65	50,000 Hours	6 x (24W) 3 x (48W)	14 x (60W) 12 x (120W)	128 fixtures

Dazzle Series

Physical							Electrical		Output	Control
Model	Color	Dimensions (HxWxD)	Color Temperature	Net Weight	LED Quantity	Beam Angle Options	Input Voltage	Power Consumption	lm/fixture	Protocol
W-DZ-12-DWXO-XX	White	7.9" x 6.7" x 4.3"	1800-6000 K	3.3 lbs	6	10/20/30/45/60	24 VDC	12W	640lm	ON/OFF
W-DZ-12-DWXS-XX	White	7.9" x 6.7" x 4.3"	1800-6000 K	3.3 lbs	6	10/20/30/45/60	24 VDC	12W	640lm	DMX512
W-DZ-12-DFWS-XX	RGBW	7.9" x 6.7" x 4.3"	Red 620-626 nm Green 519-526 nm Blue 460-466 nm White (3000, 4000, 6000 K)	3.3 lbs	6	20/30/45/60	24 VDC	12W	356lm	DMX512
W-DZ-36-DWXO-XX	White	9.3" x 8.4" x 4.9"	2700-6000 K	5.5lbs	18	10/20/30/45/60	24 VDC	36W	3352lm	ON/OFF
W-DZ-36-DWXS-XX	White	9.3" x 8.4" x 4.9"	2700-6000 K	5.5lbs	18	10/20/30/45/60	24 VDC	36W	3352lm	DMX512
W-DZ-36-DFWS-XX	RGBW	9.3" x 8.4" x 4.9"	Red 620-626 nm Green 519-526 nm Blue 460-466 nm White (3000, 4000, 5700 K)	5.5lbs	15	20/30/45/60	24 VDC	36W	1270lm	DMX512/RDM
W-DZ-60-AWXO-XX	White	10.8" x 9.7" x 4.5"	2700-6000 K	7.7 lbs	24	10/20/30/45/60	100 - 220 VAC	60W	3500lm	ON/OFF
W-DZ-60-AWXS-XX	White	10.8" x 9.7" x 4.5"	2700-6000 K	7.7 lbs	24	10/20/30/45/60	100 - 220 VAC	60W	3500lm	DMX512
W-DZ-60-AFWS-XX	RGBW	10.8" x 9.7" x 4.5"	Red 620-626 nm Green 519-526 nm Blue 460-466 nm White (3000, 4000, 6000 K)	7.7 lbs	18	20/30/45/60	100 - 220 VAC	60W	1834lm	DMX512/RDM
W-DZ-120-AWXO-XX	White	12.4" x 11.1" x 7.8"	2700-6000 K	14.1 lbs	54	10/20/30/45/60	100 - 220 VAC	120W	7405lm	ON/OFF
W-DZ-120-AWXS-XX	White	12.4" x 11.1" x 7.8"	2700-6000 K	14.1 lbs	54	10/20/30/45/60	100 - 220 VAC	120W	7405lm	DMX512
W-DZ-120-AFWS-XX	RGBW	12.4" x 11.1" x 7.8"	Red 620-626 nm Green 519-526 nm Blue 460-466 nm White (3000, 4000, 6000 K)	14.1 lbs	36	20/30/45/60	100 - 220 VAC	120W	2904lm	DMX512/RDM

COMMON PARAMETERS


Operating Temperature	Storage Temperature	Housing Material	Housing Color	Certification	Waterproof Grade	Working Life-Span	Power Linking	DMX Linking
-50 ~ 185 °F	-50 ~ 210 °F	Die-Cast Aluminum	Matte Black/ Grey	CE, RoHS	IP 65	50,000 Hours	12 fixtures	128 fixtures

Mega Series

Physical							Electrical		Output	Control
Model	Color	Dimensions (HxWxD)	Color Temperature	Net Weight	LED Quantity	Beam Angle Options	Input Voltage	Power Consumption	lm/fixture	Protocol
W-MG-200-1FWR-XX	RGBW	12.6" x 21.4" x 4.4"	Red 620-626 nm Green 519-526 nm Blue 460-466 nm White (3000, 4000, 5700 K)	25.4 lbs	40	10/20/40	100 - 220 VAC	200W	8540lm	DMX/RDM
W-MG-400-1FWR-XX	RGBW	12.6" x 21.4" x 4.4"	Red 620-626 nm Green 519-526 nm Blue 460-466 nm White (3000, 4000, 5700 K)	25.4 lbs	40	10/20/30/45	100 - 220 VAC	400W	12000lm	DMX/RDM
W-MG-800-2FWR-XX	RGBW	24.3" x 18" x 14.6"	Red 620-626nm Green 519-526 nm Blue 460-466 nm White (6500 K)	50.7 lbs	80	20/40	100 - 220 VAC	800W	19389lm	DMX/RDM

COMMON PARAMETERS

Operating Temperature	Storage Temperature	Housing Material	Housing Color	Certification	Waterproof Grade	Working Life-Span	Power Linking	DMX Linking
-50 ~ 185 °F	-50 ~ 210 °F	Die-Cast Aluminum	Matte Black/ Grey	CE, RoHS	IP 65	50,000 Hours	5 fixtures	128 fixtures

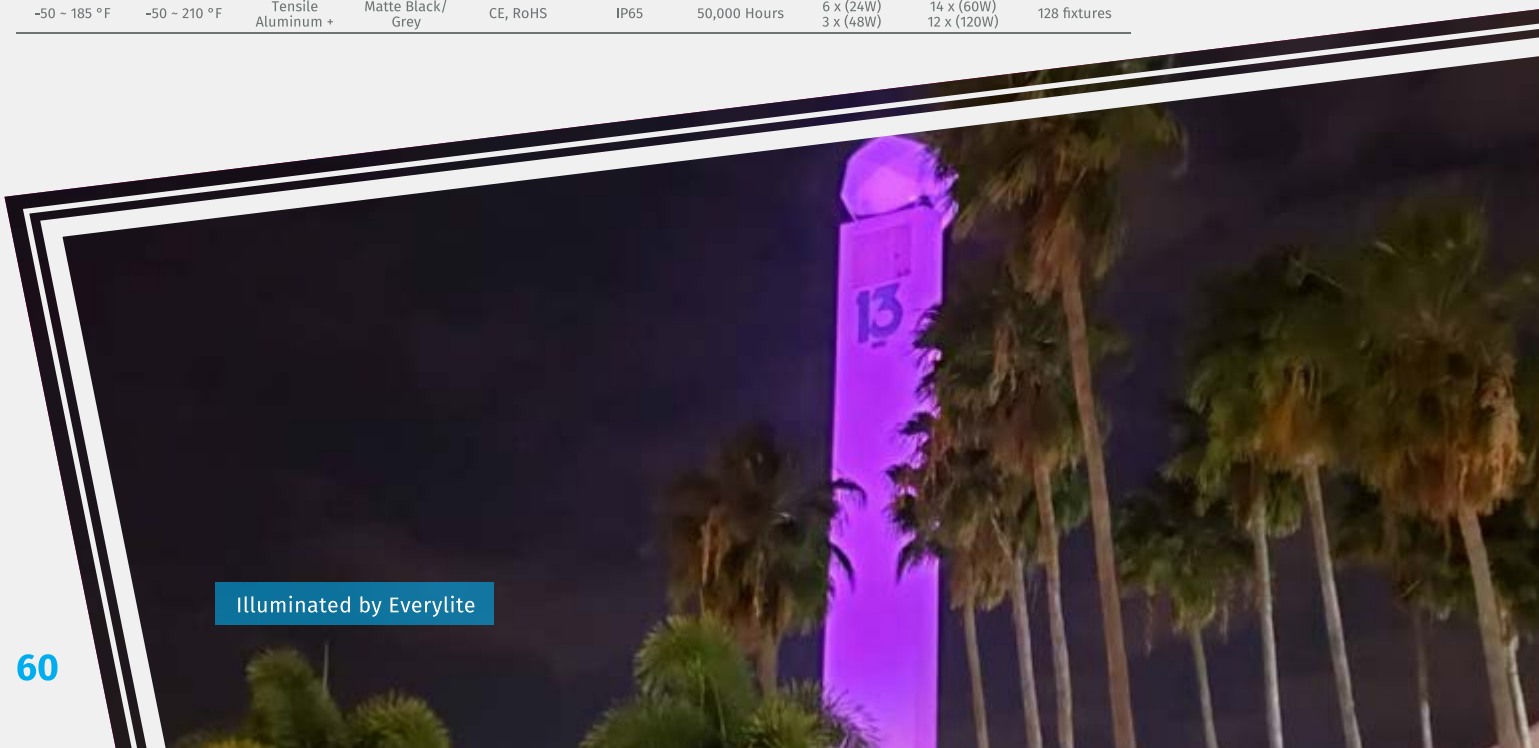

Illuminated by Everlyte