


Date:	
Type:	
Firm Name:	
Project:	



W-LN40/20/12-XX(60/30/18)-AXXX-XX



W-LN40-48-DXXX-XX

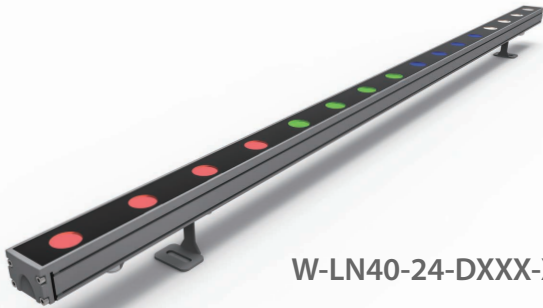

W-LN40-24-DXXX-XX



W-LN40-120-AXXX-XX

Wall Washers


Linear Series

Everylite Datasheet Ver 2.2
Revision Date 05/2020



Features

- ON/OFF, RDM or DMX512 control
- Available in White and RGBW
- Logarithmic dimming technology
- Shock resistant, IP65 waterproof rated
- Customizable beam angle, and wattage
- Easy installation with adjustable bracket
- High strength die-cast aluminum construction

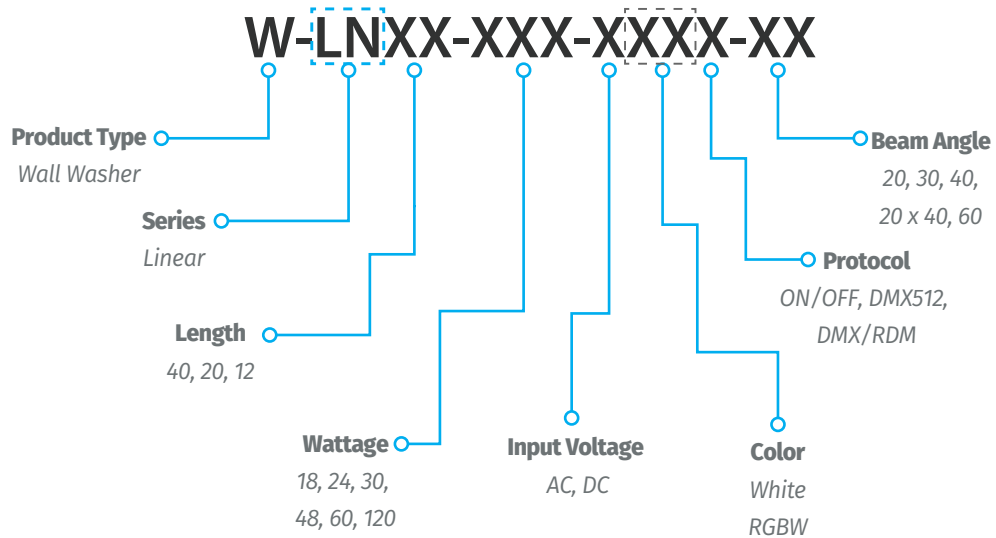

Technical Parameters by Item#

ON/OFF

Physical							Electrical		Output	Control
Model	Color	Dimensions (HxWxD)	Color Temperature	Net Weight	LED Quantity	Beam Angle Options	Input Voltage	Power Consumption	lm/fixture	Protocol
W-LN40-24-DWXO-XX	White	2.5" x 40" x 1.4"	1800K-6000K	3.3 lbs	24	20/30/40/60/20x40	24 VDC	24W	2350lm	ON/OFF
W-LN40-48-DWXO-XX	White	3.2" x 40" x 2"	1800 ~ 6000 K	5.5 lbs	24	20/30/40/60/20x40	24 VDC	48W	3750lm	ON/OFF
W-LN40-60-AWXO-XX	White	4" x 40" x 2"	1800 ~ 6000 K	6.6 lbs	24	20/30/40/60/20x40	100 - 220 VAC	60W	3750lm	ON/OFF
W-LN40-120-AWXO-XX	White	8.7" x 40" x 6.7"	3000 ~ 6000 K	16.5 lbs	16	20/30/40/60/20x40	100 - 220 VAC	120W	6654lm	ON/OFF

DMX (WHITE)

Physical							Electrical		Output	Control
Model	Color	Dimensions (HxWxD)	Color Temperature	Net Weight	LED Quantity	Beam Angle Options	Input Voltage	Power Consumption	lm/fixture	Protocol
W-LN40-48-DWXS-XX	White	3.2" x 40" x 2"	1800 ~ 6000 K	5.5 lbs	24	20/30/40/60/20x40	24 VDC	48W	3750lm	DMX512
W-LN40-60-AWXS-XX	White	4" x 40" x 2"	1800 ~ 6000 K	6.6 lbs	24	20/30/40/60/20x40	100 - 220 VAC	60W	3750lm	DMX512
W-LN40-120-AWXS-XX	White	8.7" x 40" x 6.7"	3000 ~ 6000 K	16.5 lbs	16	20/30/40/60/20x40	100 - 220 VAC	120W	6654lm	DMX512

DMX (RGBW)

Physical							Electrical		Output	Control
Model	Color	Dimensions (HxWxD)	Color Temperature	Net Weight	LED Quantity	Beam Angle Options	Input Voltage	Power Consumption	lm/fixture	Protocol
W-LN12-18-AFWS-XX	RGBW	4" x 12" x 2"	Red 620-626 nm Green 519-526 nm Blue 460-466 nm White (3000, 4000, 6000 K)	2.6 lbs	6	20/30/40/60/20x40	100 - 220 VAC	18W	550lm	DMX512
W-LN20-30-AFWS-XX	RGBW	4" x 20" x 2"	Red 620-626 nm Green 519-526 nm Blue 460-466 nm White (3000, 4000, 6000 K)	3.7 lbs	12	20/30/40/60/20x40	100 - 220 VAC	30W	1085lm	DMX512

Technical Parameters by Item#

DMX/RDM



Model	Color	Physical				Electrical		Output	Control	
		Dimensions (HxWxD)	Color Temperature	Net Weight	LED Quantity	Beam Angle Options	Input Voltage	Power Consumption	lm/fixture	Protocol
W-LN40-24-DFWR-XX	RGBW	2.5" x 40" x 1.4"	Red 620-626 nm Green 519-526 nm Blue 460-466 nm White (3000, 4000, 6000 K)	3.3 lbs	16	20/30/40/60/20x40	24 VDC	24W	1040lm	DMX512/RDM
W-LN40-48-DFWR-XX	RGBW	3.2" x 40" x 2"	Red 620-626 nm Green 519-526 nm Blue 460-466 nm White (3000, 4000, 6000 K)	5.5 lbs	16	20/30/40/60/20x40	24 VDC	48W	1652lm	DMX512/RDM
W-LN40-60-AFWR-XX	RGBW	4" x 40" x 2"	Red 620-626 nm Green 519-526 nm Blue 460-466 nm White (3000, 4000, 6000 K)	6.6 lbs	16	20/30/40/60/20x40	100 - 220 VAC	60W	2036lm	DMX512/RDM
W-LN40-120-AFWR-XX	RGBW	8.7" x 40" x 6.7"	Red 620-626 nm Green 519-526 nm Blue 460-466 nm White (3000, 4000, 6000 K)	16.5 lbs	16	20/30/40/60/20x40	100 - 220 VAC	120W	3465lm	DMX512/RDM

COMMON PARAMETERS



Operating Temperature	Storage Temperature	Housing Material	Housing Color	Certification	Waterproof Grade	Working Life-Span	DC Power Linking	AC Power Linking	DMX Linking
-50 ~ 185 °F	-50 ~ 210 °F	Tensile Aluminum + Die Cast	Matte Black/ Grey	CE, RoHS	IP65	50,000 Hours	6 x (24W) 3 x (48W)	14 x (60W) 12 x (120W)	128 fixtures

Optical Parameters



W-LN40/20/12-XX(60/30/18)-AXXX-XX

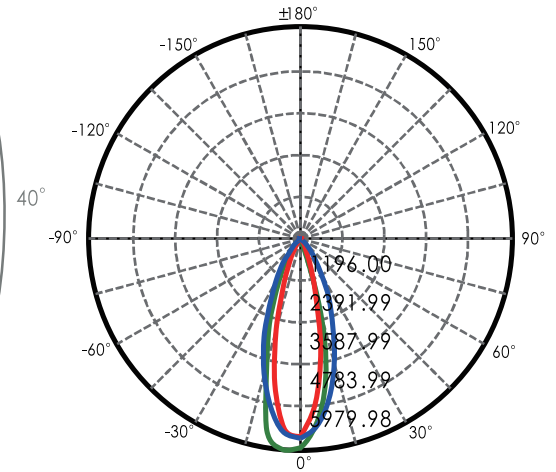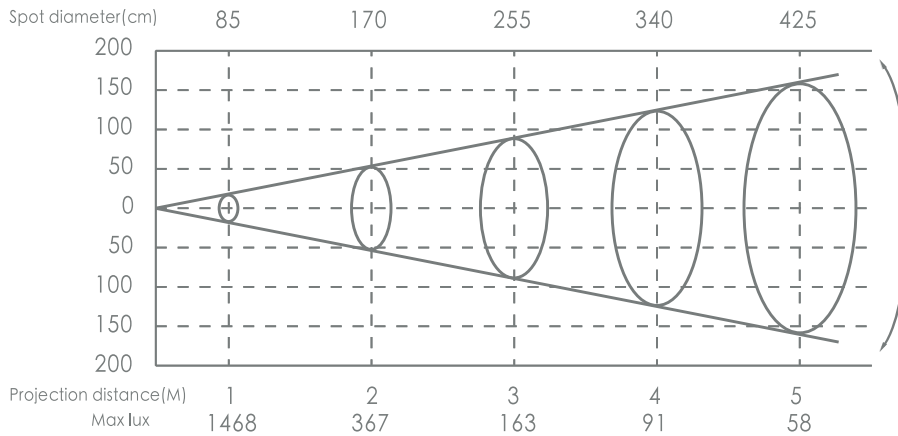

W-LN40-24-DXXX-XX

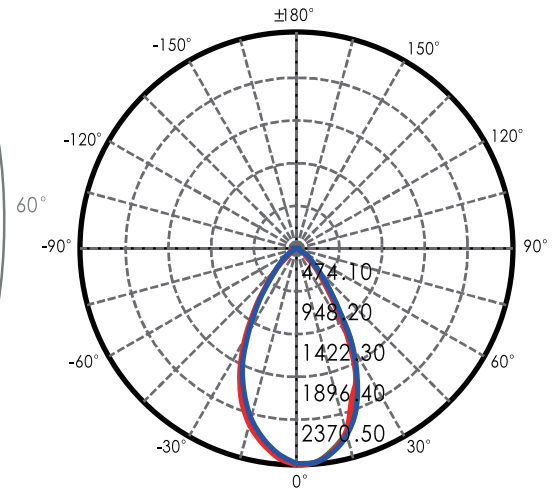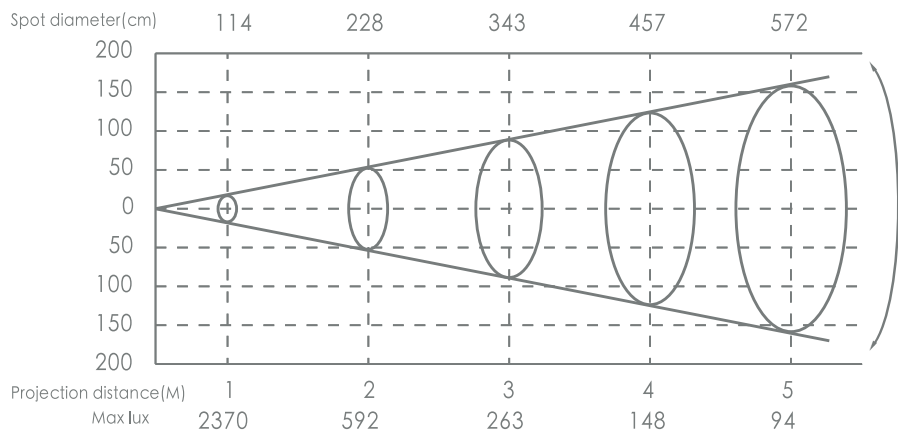


W-LN40-48-DXXX-XX

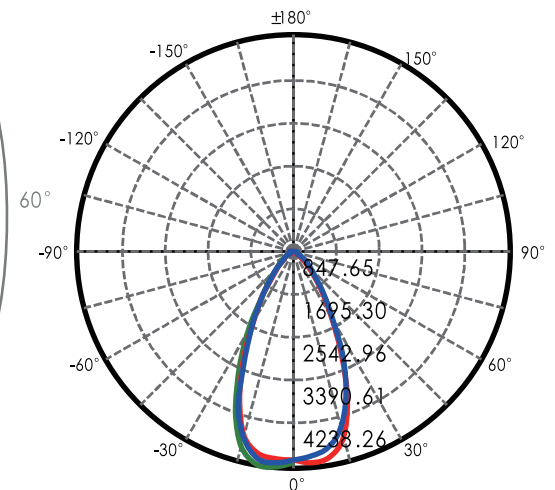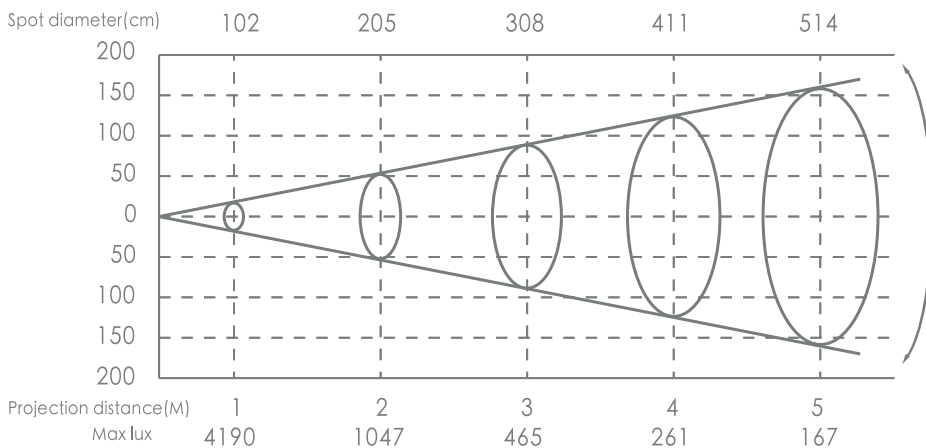


Optical Parameters

W-LN40-120-AXXX-XX

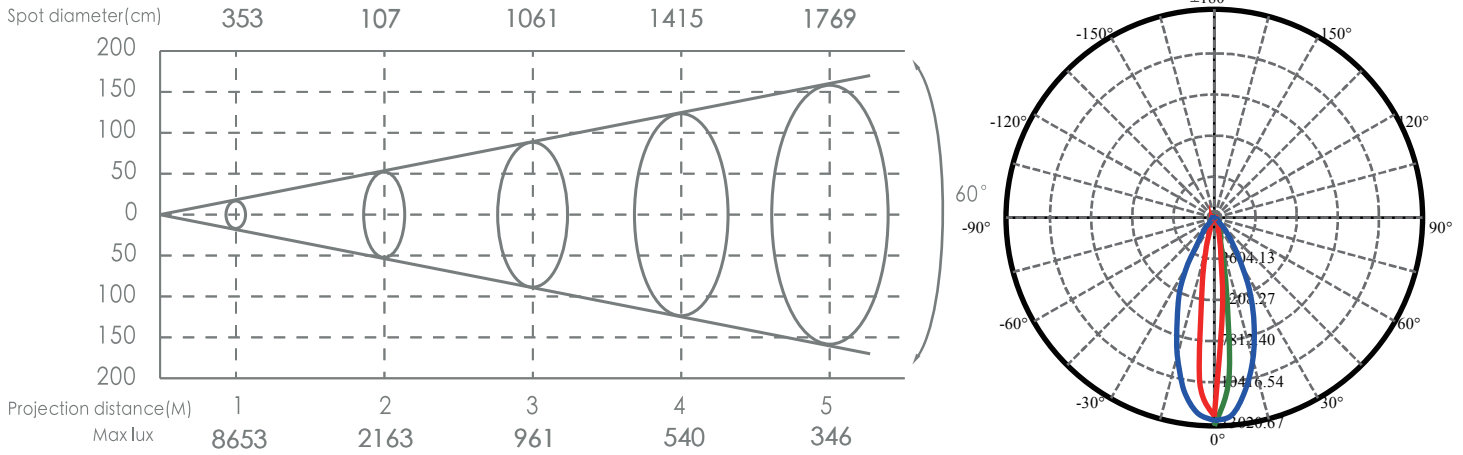


Drawings

W-LN40/20/12-XX(60/30/18)-AXXX-XX

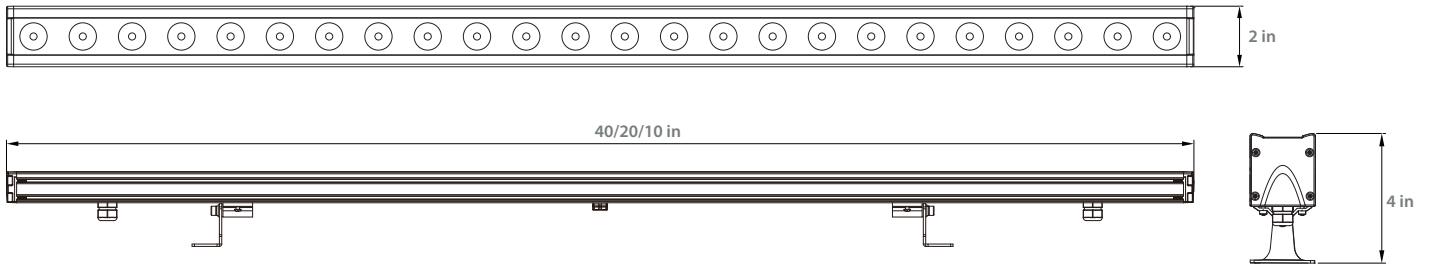


W-LN40-24-DXXX-XX

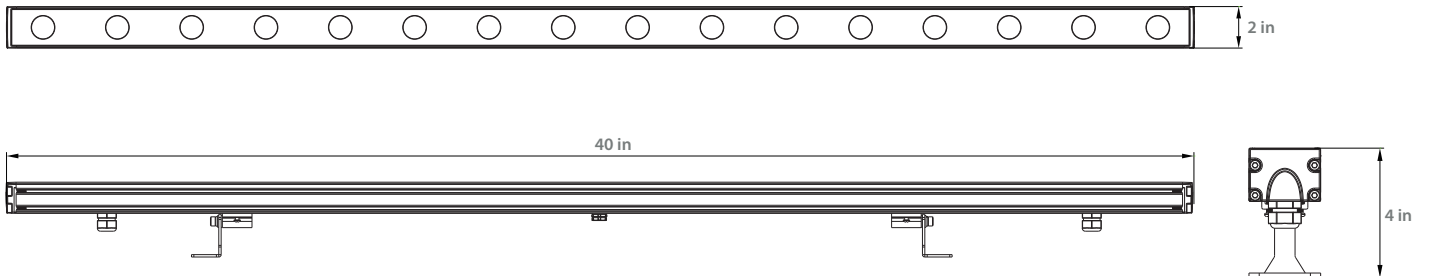

Drawings

W-LN40-48-DXXX-XX

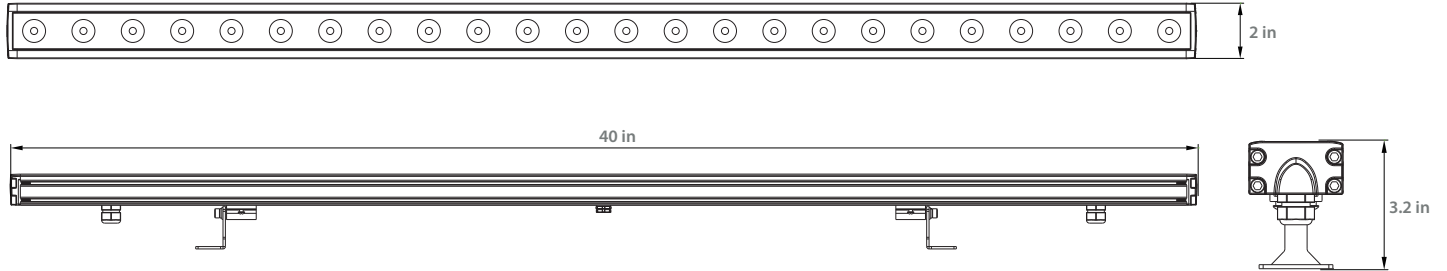

W-LN40-120-AXXX-XX

