




## YOGA Wall Washer Glow

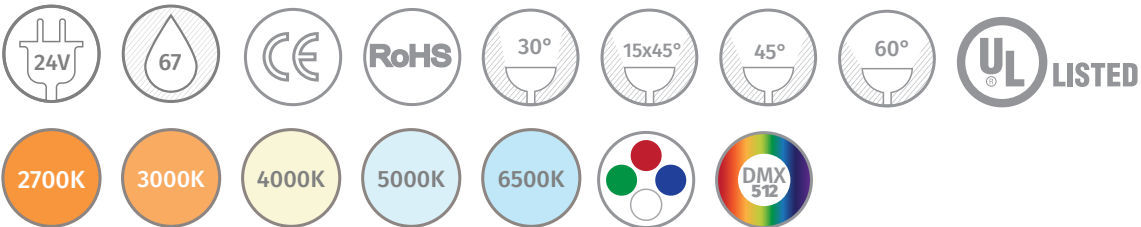

### Features

- ON/OFF, PWM, DMX Control
- Available in White Kelvin Color Temperatures and RGBW
- Customizable beam angle
- Flexible wall washer that can be cut
- Easy installation with mounting clips
- IP67 waterproof rated
- Single power feed of up to 16.4 feet
- Minimum bending radius of 6 inches




Item #	Peak Wave Length	LED Qty (pcs/ft)	Min. Cuttable Length (in)	Lm/ft	Lm/W	W/ft	Viewing Angle	Waterproof	Max Single Feed	Max Double Feed
W-YGGL-W27-24V-XX-CL	2700K	12	1.97	571	130	4.4	30, 15x45, 60	IP67	19.6 feet	39.2 feet
W-YGGL-W3-24V-XX-CL	3000K	12	1.97	584	133	4.4	30, 15x45, 60	IP67	19.6 feet	39.2 feet
W-YGGL-W4-24V-XX-CL	4000K	12	1.97	623	142	4.4	30, 15x45, 60	IP67	19.6 feet	39.2 feet
W-YGGL-W5-24V-XX-CL	5000K	12	1.97	610	139	4.4	30, 15x45, 60	IP67	19.6 feet	39.2 feet
W-YGGL-W6-24V-XX-CL	6500K	12	1.97	615	140	4.4	30, 15x45, 60	IP67	19.6 feet	39.2 feet
W-YGGL-FW-24V-XX-CL	RGBW	13	6.56	420	55	5.3	30, 15x45, 60	IP67	18 feet	36 feet
W-YGGL-FWD-24V-XX-CL	RGBW DMX	11	6.56	230	35	6.7	30, 45	IP67	16.4 feet	32.8 feet

\*\*Where XX is Beam Angle


## Drawing

UNITS: Millimeters [Inches]


W-YGGL-WX-24V-XX-CL

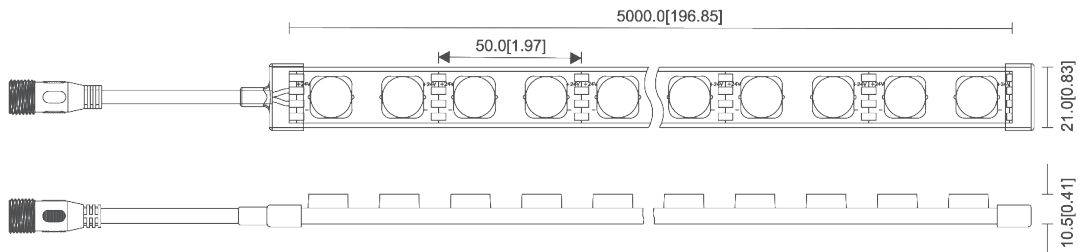


W-YGGL-FWX-24V-XX-CL

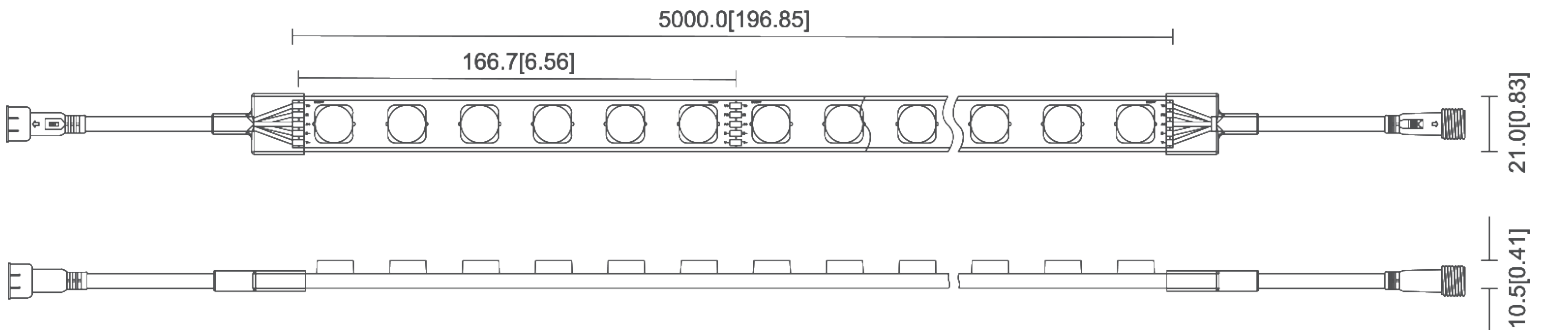


W-YGGL-CP

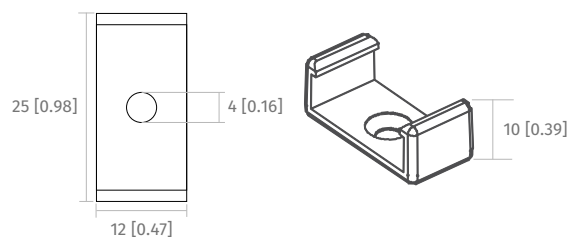

## 30° Beam Angle Option

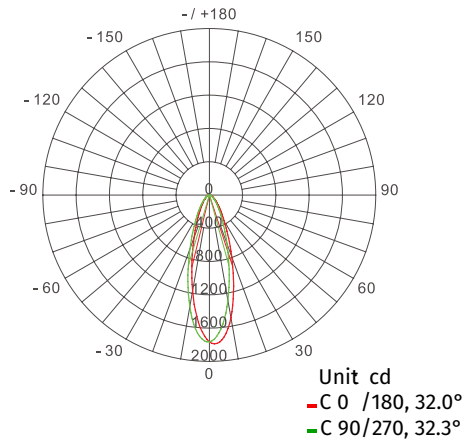


AVERAGE BEAM ANGLE(50%): 32.1°




Height	Eavg, Emax	Beam Angle: 31.83°	Diameter
0.3m	13269,19945lx		17.11cm
0.6m	3317,4986lx		34.21cm
0.9m	1474,2216lx		51.32cm
1.2m	829.3,1247lx		68.42cm
1.5m	530.7,797.8lx		85.53cm
1.8m	368.6,554.0lx		102.63cm
2.1m	270.8,470.0lx		119.74cm
2.4m	207.3,311.6lx		136.85cm
2.7m	163.8,246.2lx		153.95cm
3.0m	132.7,199.5lx		171.06cm

## 15 x 45° Beam Angle Option

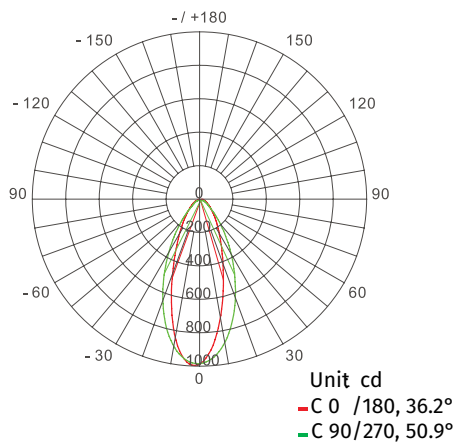


AVERAGE BEAM ANGLE(50%): 32.1°

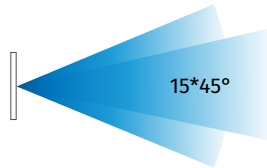


Height	Eavg, Emax	Beam Angle: 36.28°	Diameter
0.3m	7539,10959lx		19.66cm
0.6m	1885,2740lx		39.31cm
0.9m	837.7,1218lx		58.97cm
1.2m	471.2,684.9lx		78.62cm
1.5m	301.6,438.4lx		98.28cm
1.8m	209.4,304.4lx		117.93cm
2.1m	153.9,223.7lx		137.59cm
2.4m	117.8,171.2lx		157.24cm
2.7m	93.08,135.3lx		176.90cm
3.0m	75.39,109.6lx		196.55cm

## 60° Beam Angle Option

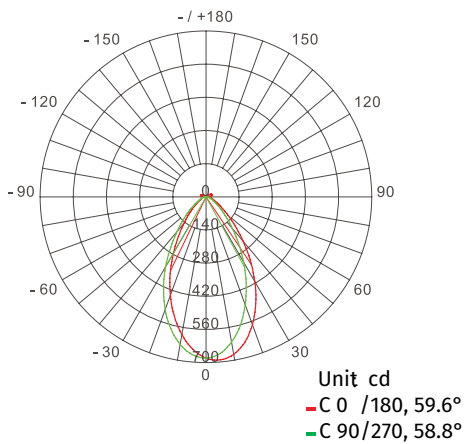

AVERAGE BEAM ANGLE(50%): 39.2°



Height	Eavg, Emax	Beam Angle: 58.82°	Diameter
0.3m	4405,7654lx		33.82cm
0.6m	1101,1913lx		67.64cm
0.9m	489.4,850.4lx		101.46cm
1.2m	275.3,478.3lx		135.28cm
1.5m	176.2,306.1lx		169.10cm
1.8m	122.4,212.6lx		202.74cm
2.1m	89.89,156.2lx		236.74cm
2.4m	68.83,119.6lx		270.56cm
2.7m	54.38,94.49lx		304.38cm
3.0m	44.05,76.54lx		338.20cm

