


Pixel Bar VAC Maya Series

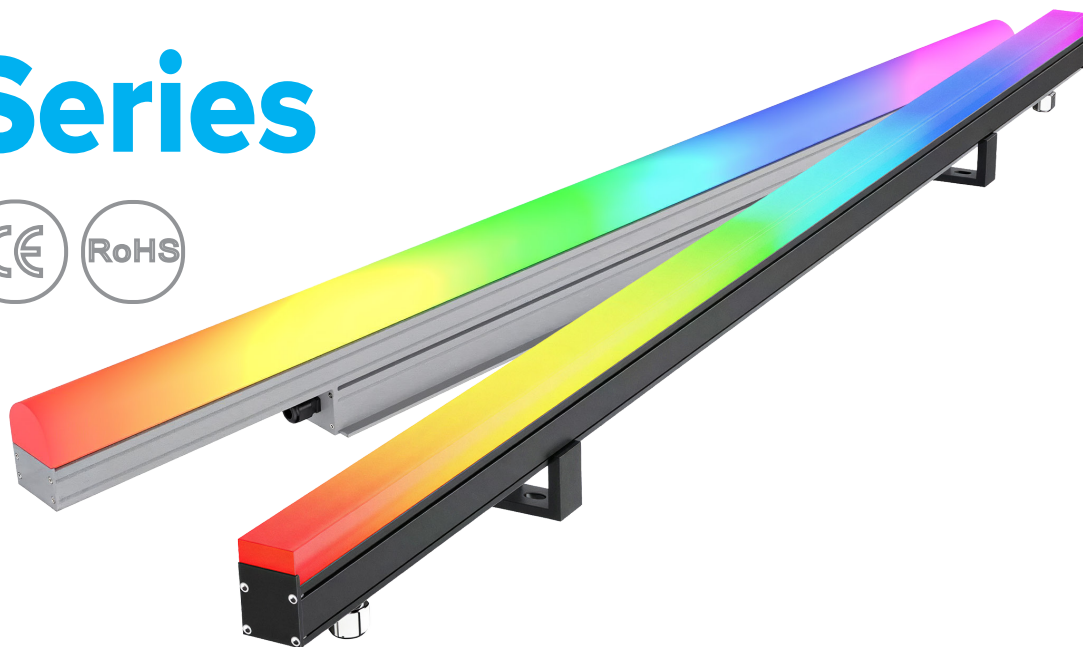


Specifications

Product Code	Color	H x W x D (in)	Wattage	Input	Technology	Pixels	Acrylic
PB-MY16-11-AFWR-SA	RGBW	2.83 x 15.75 x 1.57	10.4	120-277 VAC	DMX512-RDM	4	Square
PB-MY16-11-AFWR-RA	RGBW	3.19 x 15.75 x 1.57	10.4	120-277 VAC	DMX512-RDM	4	Round
PB-MY24-16-AFWR-SA	RGBW	2.83 x 23.62 x 1.57	15.6	120-277 VAC	DMX512-RDM	6	Square
PB-MY24-16-AFWR-RA	RGBW	3.19 x 23.62 x 1.57	15.6	120-277 VAC	DMX512-RDM	6	Round
PB-MY36-24-AFWR-SA	RGBW	2.83 x 35.43 x 1.57	23.4	120-277 VAC	DMX512-RDM	9	Square
PB-MY36-24-AFWR-RA	RGBW	3.19 x 35.43 x 1.57	23.4	120-277 VAC	DMX512-RDM	9	Round
PB-MY48-32-AFWR-SA	RGBW	2.83 x 47.24 x 1.57	31.2	120-277 VAC	DMX512-RDM	12	Square
PB-MY48-32-AFWR-RA	RGBW	3.19 x 47.24 x 1.57	31.2	120-277 VAC	DMX512-RDM	12	Round


* White options of 1800K, 2700K, 3000K, 4000K, 6500K

Product Specification - Unit Inches (MM)


Square Acrylic Face




Round Acrylic Face



PB-XX16-11-AFWR-XA

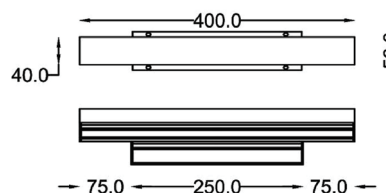


Product Specification - Unit Inches (MM)

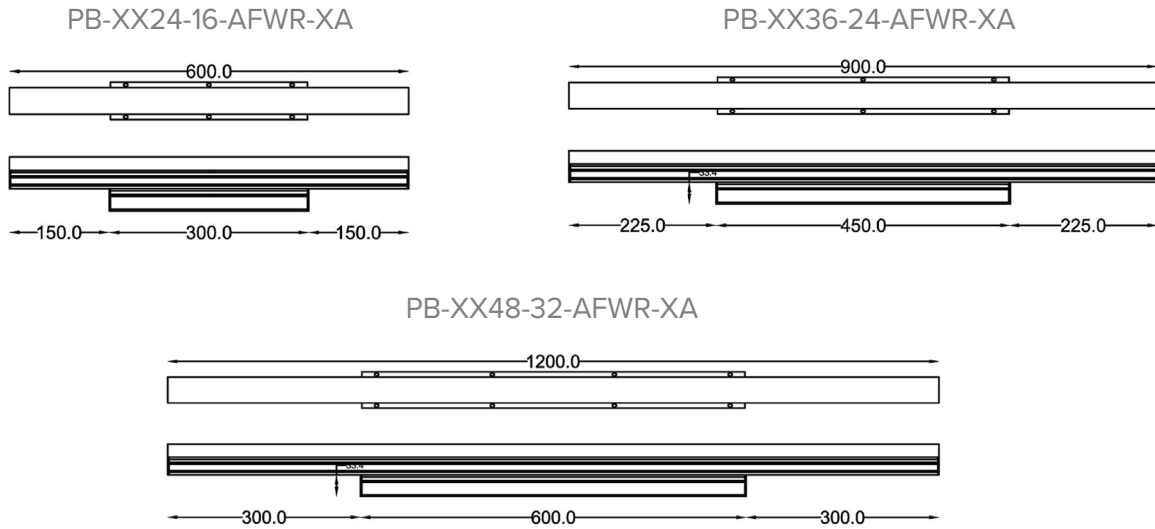

Mounting Accessories - Unit Inches (MM)




ITEM: W-LP-Mount-81

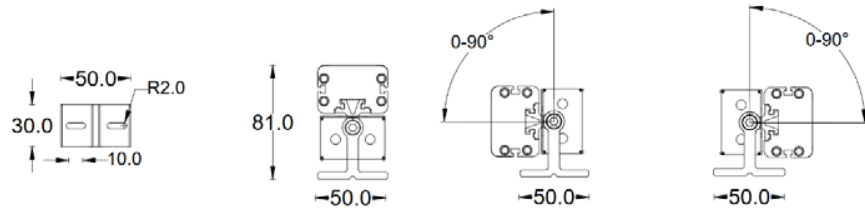

DESCRIPTION: Adjustable mounting option for applications that require angle adjustments. It can rotate up to 180 degree.




ITEM: W-LP-Mount-100

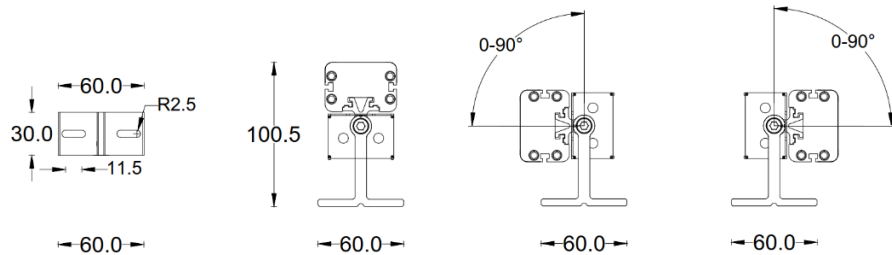

DESCRIPTION: Adjustable mounting option for applications that require angle adjustments. It can rotate up to 180 degree.



ITEM: W-LP-Mount-Lbracket

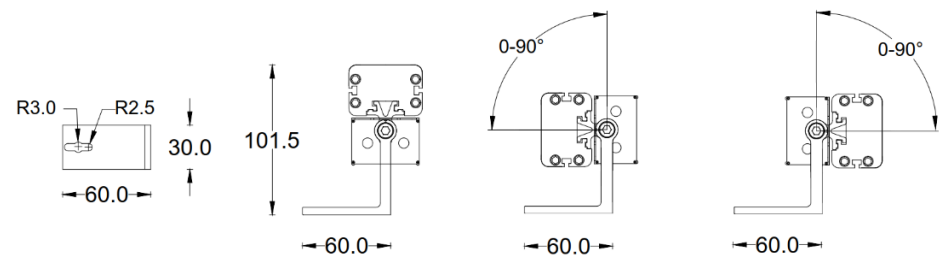

DESCRIPTION: Adjustable mounting option for applications that require angle adjustments. It can rotate up to 180 degree.




Cable Conductor Specifications


Cable	Function Wire	Color
Power Lead In	AC Live	Black
	AC Neutral	White
	AC Ground	Green
DMX Lead In	DMX+	Purple
	DMX- DMX GND	Pink Yellow

Cable Accessories

Product Code	Description
W-CNT-6F	Wall Washer connector, IP66, 6-pin Female, AC Power and DMX Signal input
W-CNT-6F-33M	Wall Washer connector, IP66, 6-pin Female, T Connector to separate AC Power Input and DMX Signal Input wiring connections
W-CNT-3F-AC	Wall Washer connector, IP66, 3-pin Female, AC Power input
W-CNT-3F-DMX	Wall Washer connector, IP66, 3-pin Female, DMX Signal input
W-CNT-6T	Wall Washer connector, IP66, 6-pin T Connector to reintroduce AC Power
W-CNT-6JP-XX	Wall Washer connector, IP66, 6-pin Jumper, XX inch length
W-TMN-6M	Wall Washer connector, IP66, 6-pin Male, DMX Terminator (end of run)

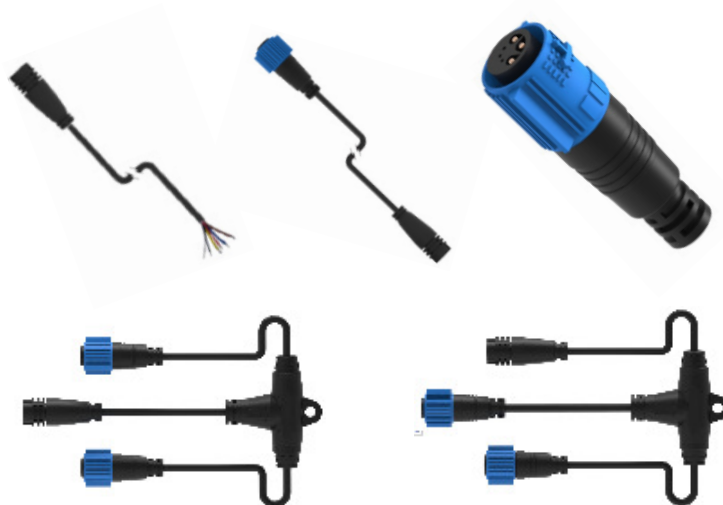

Pixel Bar VAC Maya Series

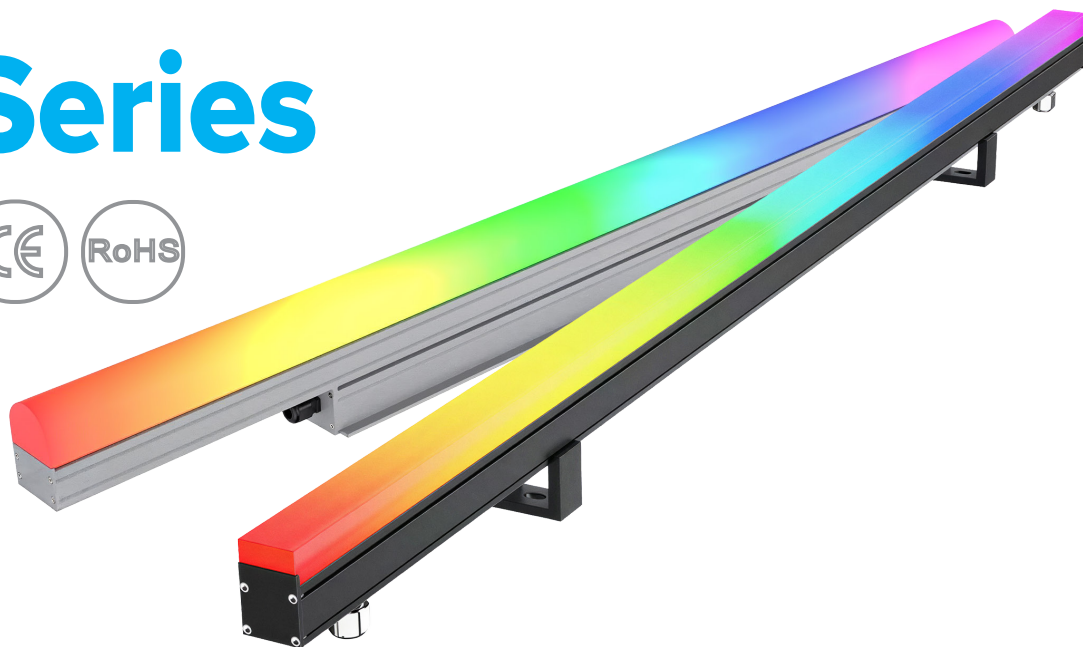


Specifications

Product Code	Color	H x W x D (in)	Wattage	Input	Technology	Pixels	Acrylic
PB-MY16-11-AFWR-SA	RGBW	2.83 x 15.75 x 1.57	10.4	120-277 VAC	DMX512-RDM	4	Square
PB-MY16-11-AFWR-RA	RGBW	3.19 x 15.75 x 1.57	10.4	120-277 VAC	DMX512-RDM	4	Round
PB-MY24-16-AFWR-SA	RGBW	2.83 x 23.62 x 1.57	15.6	120-277 VAC	DMX512-RDM	6	Square
PB-MY24-16-AFWR-RA	RGBW	3.19 x 23.62 x 1.57	15.6	120-277 VAC	DMX512-RDM	6	Round
PB-MY36-24-AFWR-SA	RGBW	2.83 x 35.43 x 1.57	23.4	120-277 VAC	DMX512-RDM	9	Square
PB-MY36-24-AFWR-RA	RGBW	3.19 x 35.43 x 1.57	23.4	120-277 VAC	DMX512-RDM	9	Round
PB-MY48-32-AFWR-SA	RGBW	2.83 x 47.24 x 1.57	31.2	120-277 VAC	DMX512-RDM	12	Square
PB-MY48-32-AFWR-RA	RGBW	3.19 x 47.24 x 1.57	31.2	120-277 VAC	DMX512-RDM	12	Round


* White options of 1800K, 2700K, 3000K, 4000K, 6500K

Product Specification - Unit Inches (MM)

Square Acrylic Face



Round Acrylic Face



PB-XX16-11-AFWR-XA

